


NHM[®] PRODUCT DETAILS

Movable screw
(Rotating bracket)

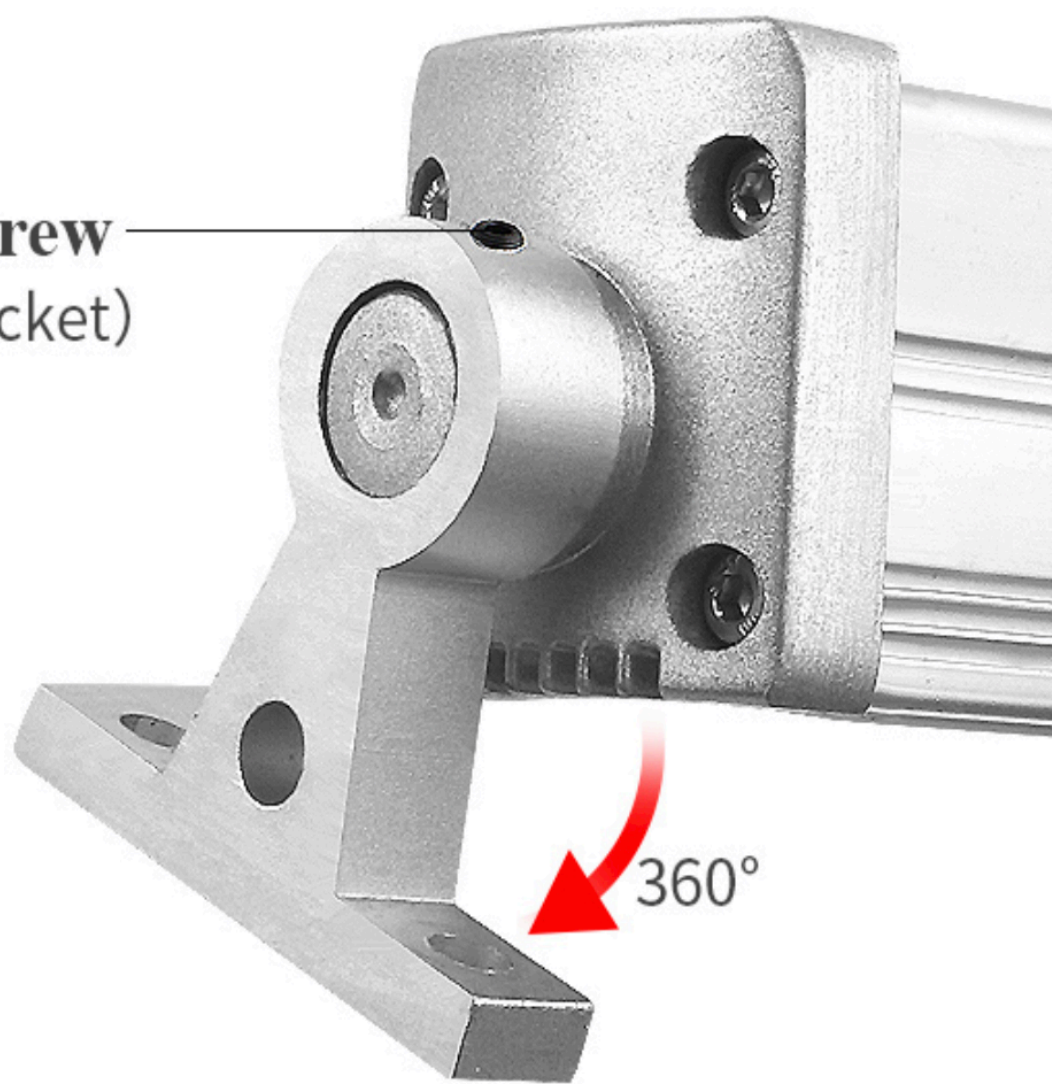

ALUMINUM SHELL


- Anodizing treatment
- preservative

Resist the rolling of 1.5 ton vehicles



Various specifications of the product

Number	Model	Power	Voltage	Total length	Installation size	Mounting holes
A1	SFDX200-02WT	6W	24V	280mm	233*32	(Φ6)mm
A2	SFDX300-02WT	10W	24V	380mm	333*32	(Φ6)mm
A3	SFDX400-02WT	12W	24V	445mm	398*32	(Φ6)mm
A4	SFDX500-02WT	16W	24V	580mm	533*32	(Φ6)mm
A5	SFDX600-02WT	20W	24V	680mm	633*32	(Φ6)mm
A6	SFDX800-02WT	28W	24V	850mm	803*32	(Φ6)mm
A7	SFDX900-02WT	30W	24V	980mm	933*32	(Φ6)mm
A8	SFDX1200-02WT	40W	24V	1250mm	1203*32	(Φ6)mm
B1	SFDX200-22WT	6W	220V	280mm	233*32	(Φ6)mm
B2	SFDX300-22WT	10W	220V	380mm	333*32	(Φ6)mm
B3	SFDX400-22WT	12W	220V	445mm	398*32	(Φ6)mm
B4	SFDX500-22WT	16W	220V	580mm	533*32	(Φ6)mm
B5	SFDX600-22WT	20W	220V	680mm	633*32	(Φ6)mm
B6	SFDX800-22WT	28W	220V	850mm	803*32	(Φ6)mm
B7	SFDX900-22WT	30W	220V	980mm	933*32	(Φ6)mm
B8	SFDX1200-22WT	40W	220V	1250mm	1203*32	(Φ6)mm

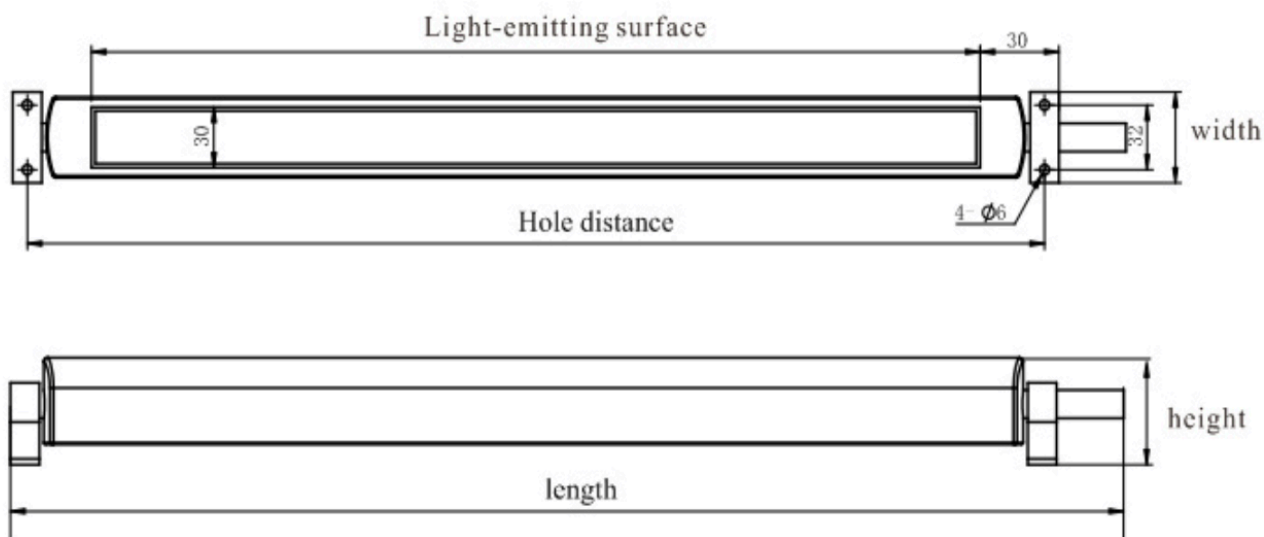

H1 SERIES
360 degree full body waterproof
Waterproof grade IP68



Especificación

Artículo	Valor
Clasificación IP	IP68
Temperatura de Color (CCT)	6000K (alerta diurna)
Ángulo de haz (°)	60
CRI (Ra)	80
Voltaje de entrada (V)	85-265V CA
Eficiencia luminosa de la lámpara (lm/w)	120
Flujo luminoso de la lámpara (lm)	720
Garantía (año)	1 año
Vida útil (HORA)	50000
Temperatura de funcionamiento (°C)	-20 °C-50 °C
Índice de reproducción de Color (Ra)	80
Lugar de origen	China
	Guangdong
Número de modelo	H1
El nombre de la marca	NHM
Color emisor	Blanco
La certificación	Ce RoHS
Fuente de alimentación	AC DC
Fuente de luz	LED
Apoyo Dimmer	NO
Color	De plata
Soluciones de iluminación de servicio	Iluminación y circuitos de diseño
Vida útil (horas)	50000
Tiempo de trabajo (horas)	50000